

CSD22206W -8V P 通道 NexFET™ 功率金属氧化物半导体场效应晶体管 (MOSFET)

1 特性

- 超低电阻
- 小尺寸封装 1.5mm x 1.5mm
- 无铅
- 栅极静电放电 (ESD) 保护
- 符合 RoHS 环保标准
- 无卤素
- 栅 - 源电压钳位


2 应用范围

- 负载开关 应用范围
- 电池管理
- 电池保护


3 说明

这款 -8V、4.7mΩ、1.5mm × 1.5mm 器件设计用于在超薄且具有出色散热特性的超小外形尺寸封装内提供最低的导通电阻和栅极电荷。低导通电阻与小型封装尺寸和低高度结合在一起，使得此器件非常适合于电池供电运行的空间受限应用。

顶视图和电路配置

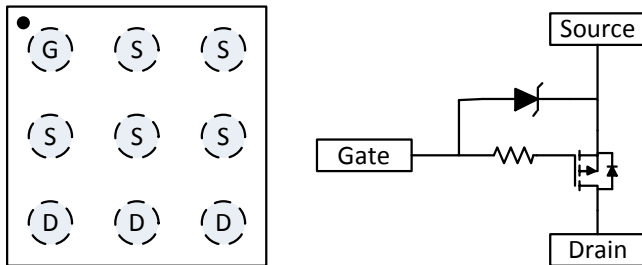

$R_{DS(on)}$ 与 V_{GS} 对比

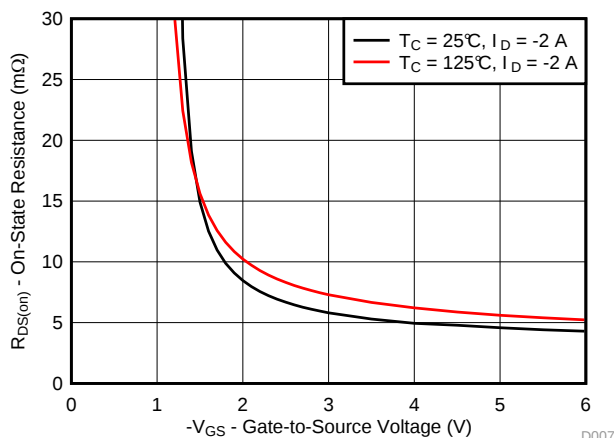

产品概要

$T_A = 25^\circ\text{C}$		典型值	单位
V_{DS}	漏源电压	-8	V
Q_g	栅极电荷总量 (-4.5V)	11.2	nC
Q_{gd}	栅极电荷 (栅极到漏极)	1.8	nC
$R_{DS(on)}$	漏源导通电阻	$V_{GS} = -2.5\text{V}$	6.8
		$V_{GS} = -4.5\text{V}$	4.7
$V_{GS(th)}$	阈值电压	-0.7	V

器件信息

器件	数量	包装介质	封装	运输
CSD22206W	3000	7 英寸卷带	1.50mm × 1.50mm 晶圆级球状引脚栅格阵列 (BGA) 封装	卷带封装
CSD22206WT	250			


绝对最大额定值

$T_A = 25^\circ\text{C}$		值	单位
V_{DS}	漏源电压	-8	V
V_{GS}	栅源电压	-6	V
I_D	持续漏极电流 ⁽¹⁾	-5	A
	脉冲漏极电流 ⁽²⁾	-108	A
P_D	功率耗散	1.7	W
T_J, T_{stg}	工作结温, 储存温度	-55 至 150	°C

(1) 器件在 105°C 温度下运行。

(2) 典型 $R_{\theta JA} = 75^\circ\text{C/W}$ (安装于具有最大铜安装区域的 FR4 材料)，脉宽 ≤ 100μs，占空比 ≤ 1%。

栅极电荷

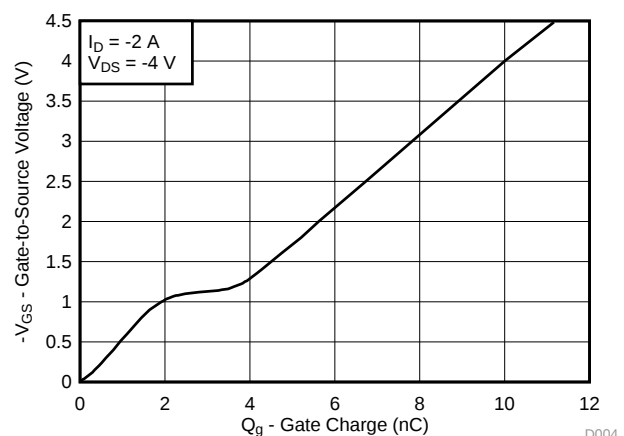

目录

1	特性	1	6	器件和文档支持	7
2	应用范围	1	6.1	接收文档更新通知	7
3	说明	1	6.2	社区资源	7
4	修订历史记录	2	6.3	商标	7
5	Specifications	3	6.4	静电放电警告	7
5.1	Electrical Characteristics	3	6.5	Glossary	7
5.2	Thermal Information	3	7	机械、封装和可订购信息	8
5.3	Typical MOSFET Characteristics	4	7.1	CSD22206W 封装尺寸	8
			7.2	建议的焊盘图案	9

4 修订历史记录

日期	修订版本	注释
2017 年 5 月	*	初始发行版。

5 Specifications

5.1 Electrical Characteristics

 $T_A = 25^\circ\text{C}$ (unless otherwise stated)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
STATIC CHARACTERISTICS						
BV _{DSS}	Drain-to-source voltage	V _{GS} = 0 V, I _{DS} = −250 μA	−8			V
BV _{GSS}	Gate-to-source voltage	V _{DS} = 0 V, I _G = −250 μA	−6			V
I _{DSS}	Drain-to-source leakage current	V _{GS} = 0 V, V _{DS} = −6.4 V			−1	μA
I _{GSS}	Gate-to-source leakage current	V _{DS} = 0 V, V _{GS} = −6 V			−100	nA
V _{GS(th)}	Gate-to-source threshold voltage	V _{DS} = V _{GS} , I _{DS} = −250 μA	−0.4	−0.7	−1.05	V
R _{DS(on)}	Drain-to-source on resistance	V _{GS} = −2.5 V, I _{DS} = −2 A		6.8	9.1	mΩ
		V _{GS} = −4.5 V, I _{DS} = −2 A		4.7	5.7	
g _{fs}	Transconductance	V _{DS} = −0.8 V, I _{DS} = −2 A		20		S
DYNAMIC CHARACTERISTICS						
C _{ISS}	Input capacitance	V _{GS} = 0 V, V _{DS} = −4 V, f = 1 MHz		1750	2275	pF
C _{OSS}	Output capacitance			960	1250	pF
C _{RSS}	Reverse transfer capacitance			340	440	pF
R _G	Series gate resistance			30		Ω
Q _g	Gate charge total (−4.5 V)	V _{DS} = −4 V, I _D = −2 A		11.2	14.6	nC
Q _{gd}	Gate charge gate-to-drain			1.8		nC
Q _{gs}	Gate charge gate-to-source			2.1		nC
Q _{g(th)}	Gate charge at V _{th}			1.3		nC
Q _{OSS}	Output charge	V _{DS} = −4 V, V _{GS} = 0 V		7.2		nC
t _{d(on)}	Turnon delay time	V _{DS} = −4 V, V _{GS} = −4.5 V, I _{DS} = −2 A, R _G = 0 Ω		37		ns
t _r	Rise time			17		ns
t _{d(off)}	Turnoff delay time			118		ns
t _f	Fall time			45		ns
DIODE CHARACTERISTICS						
V _{SD}	Diode forward voltage	I _{DS} = −2 A, V _{GS} = 0 V	−0.69	−1.0		
Q _{rr}	Reverse recovery charge	V _{DS} = −4 V, I _F = −1 A, di/dt = 200 A/μs		24		nC
t _{rr}	Reverse recovery time			59		ns


5.2 Thermal Information

 $T_A = 25^\circ\text{C}$ (unless otherwise stated)


THERMAL METRIC		TYPICAL VALUES	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance ⁽¹⁾	75	$^\circ\text{C}/\text{W}$
	Junction-to-ambient thermal resistance ⁽²⁾	230	

(1) Device mounted on FR4 material with 1-in² (6.45-cm²), 2-oz (0.071-mm) thick Cu.

(2) Device mounted on FR4 material with minimum Cu mounting area.

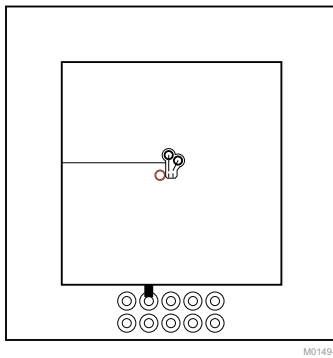


Typ $R_{\theta JA} = 75^{\circ}\text{C/W}$
when mounted on 1 in²
of 2-oz Cu.

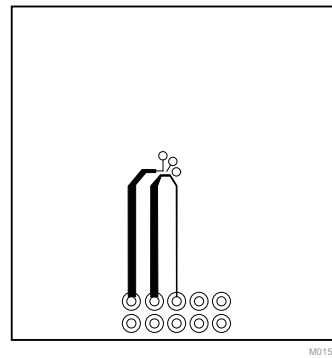

Typ $R_{\theta JA} = 230^{\circ}\text{C/W}$
when mounted on
minimum pad area of
2-oz Cu.

5.3 Typical MOSFET Characteristics

$T_A = 25^{\circ}\text{C}$ (unless otherwise stated)

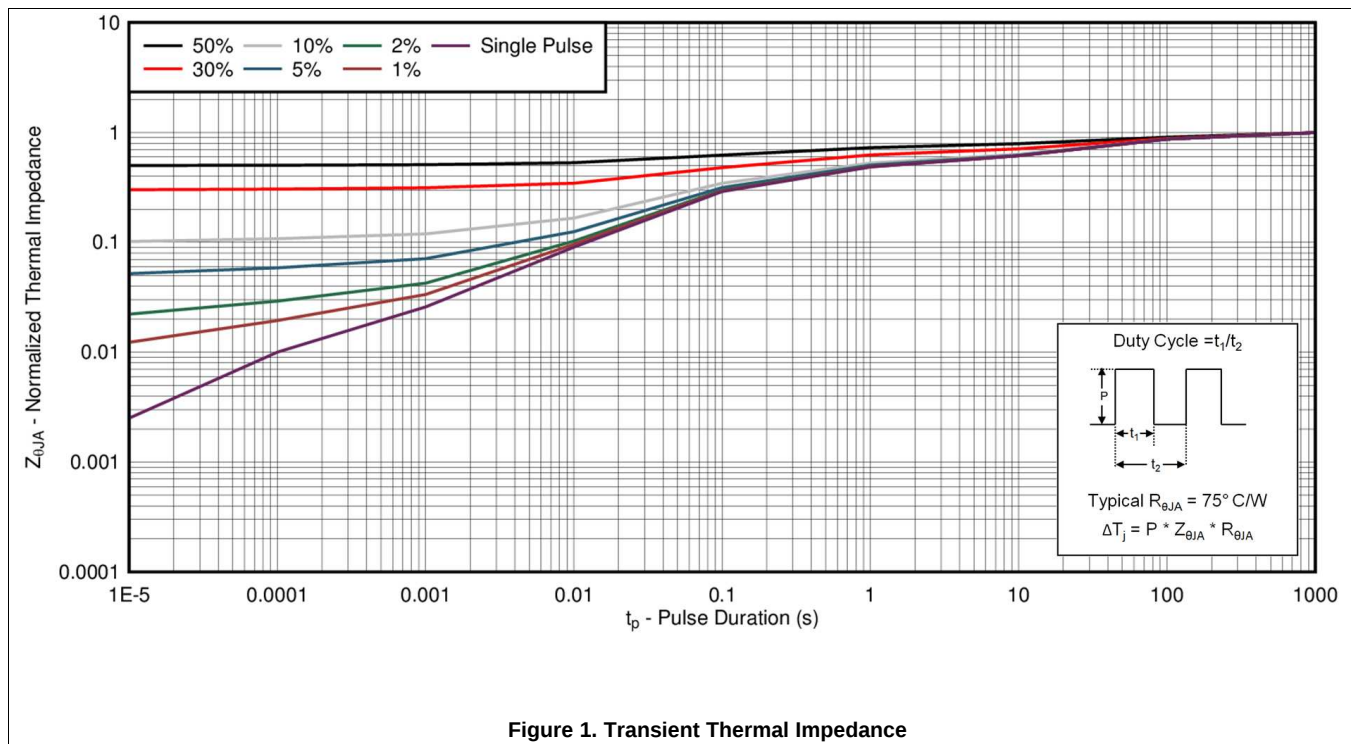

Typical MOSFET Characteristics (continued)

$T_A = 25^\circ\text{C}$ (unless otherwise stated)

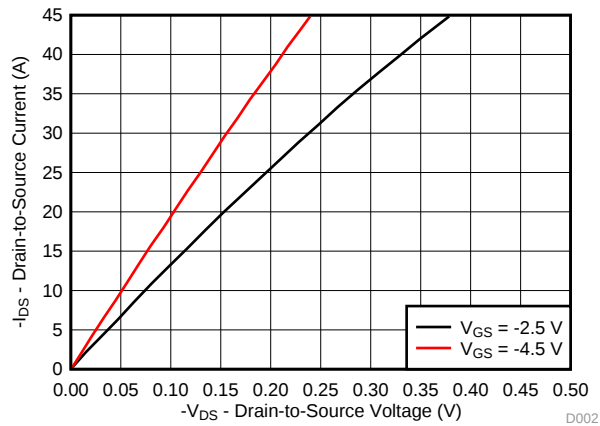


Figure 2. Saturation Characteristics

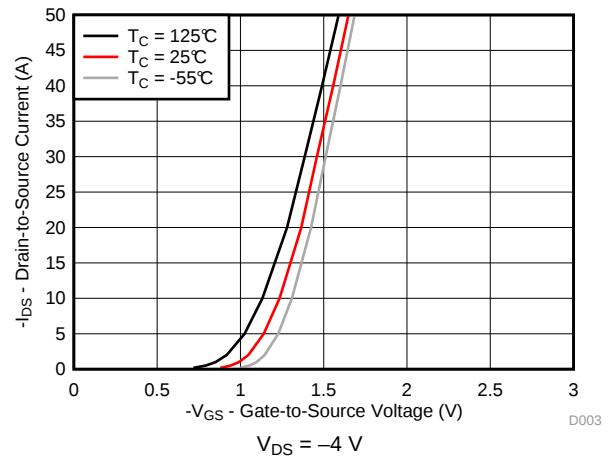


Figure 3. Transfer Characteristics

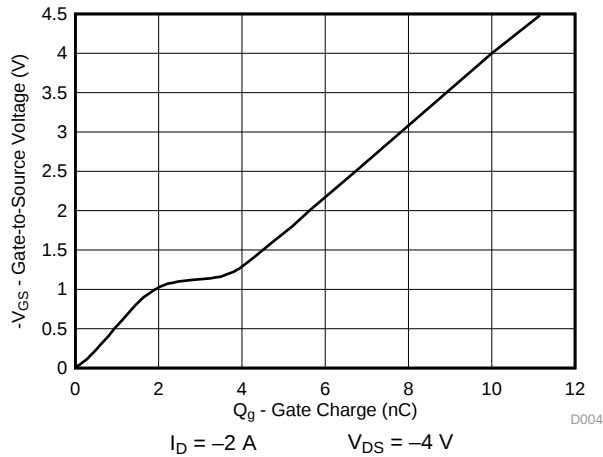


Figure 4. Gate Charge

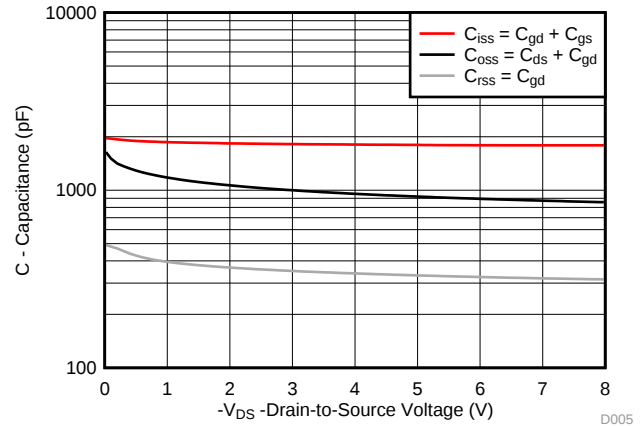


Figure 5. Capacitance

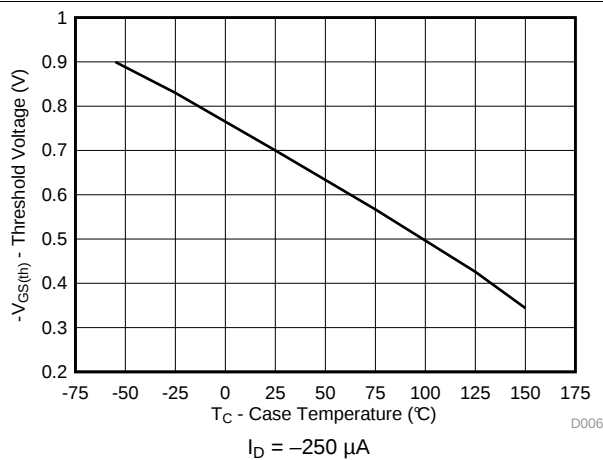


Figure 6. Threshold Voltage vs Temperature

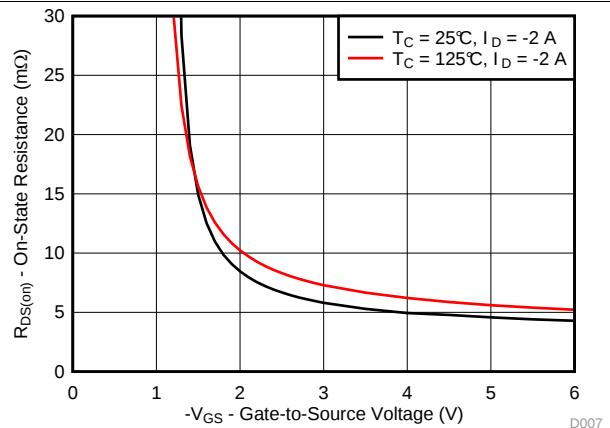


Figure 7. On-State Resistance vs Gate-to-Source Voltage

Typical MOSFET Characteristics (continued)

$T_A = 25^\circ\text{C}$ (unless otherwise stated)

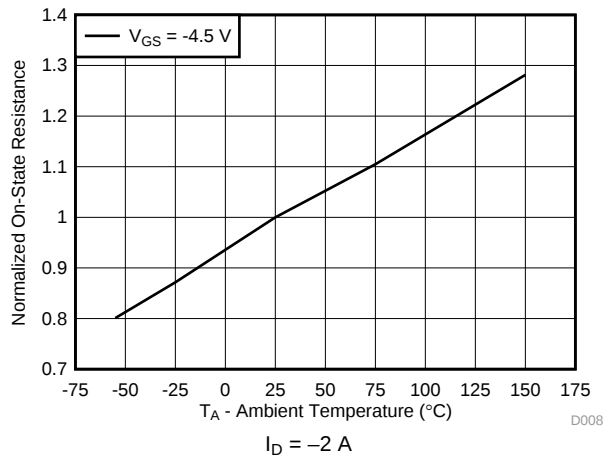


Figure 8. Normalized On-State Resistance vs Temperature

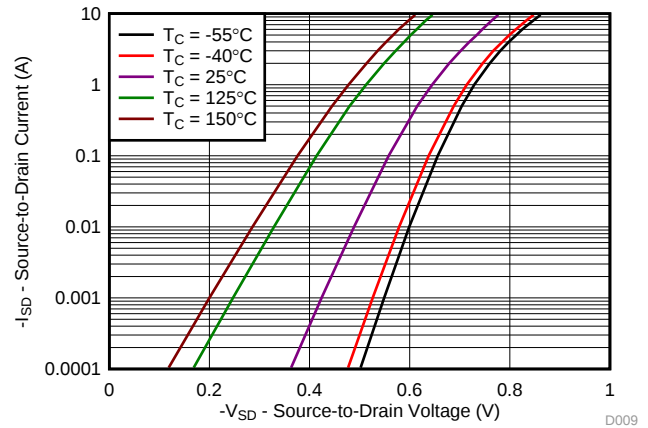


Figure 9. Typical Diode Forward Voltage

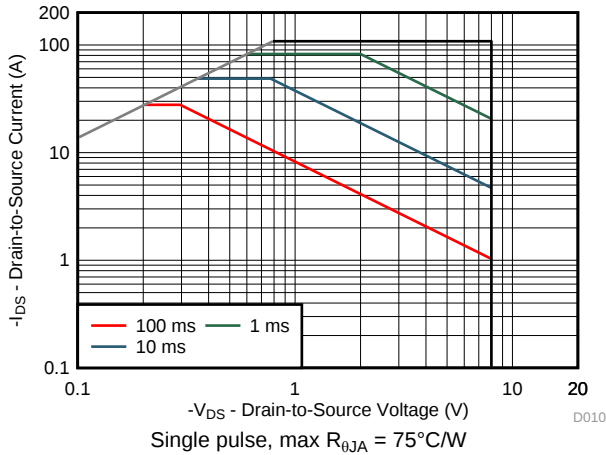


Figure 10. Maximum Safe Operating Area

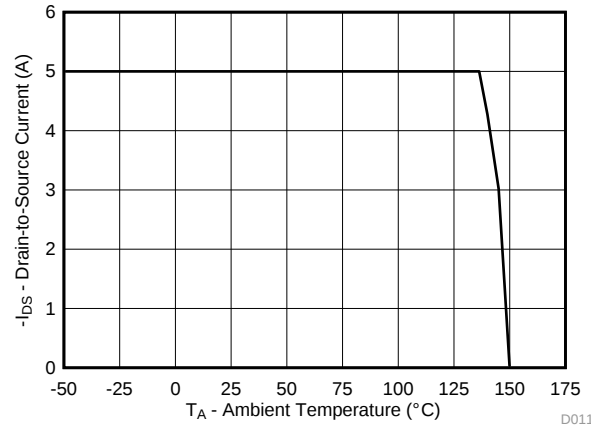


Figure 11. Maximum Drain Current vs Temperature

6 器件和文档支持

6.1 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。请单击右上角的通知我 进行注册，即可收到任意产品信息更改每周摘要。有关更改的详细信息，请查看任意已修订文档中包含的修订历史记录。

6.2 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

6.3 商标

NexFET, E2E are trademarks of Texas Instruments.
All other trademarks are the property of their respective owners.

6.4 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

6.5 Glossary


SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

7 机械、封装和可订购信息

以下页面包括机械、封装和可订购信息。这些信息是指定器件的最新可用数据。这些数据发生变化时，我们可能不会另行通知或修订此文档。如欲获取此产品说明书的浏览器版本，请参见左侧的导航栏。

7.1 CSD22206W 封装尺寸

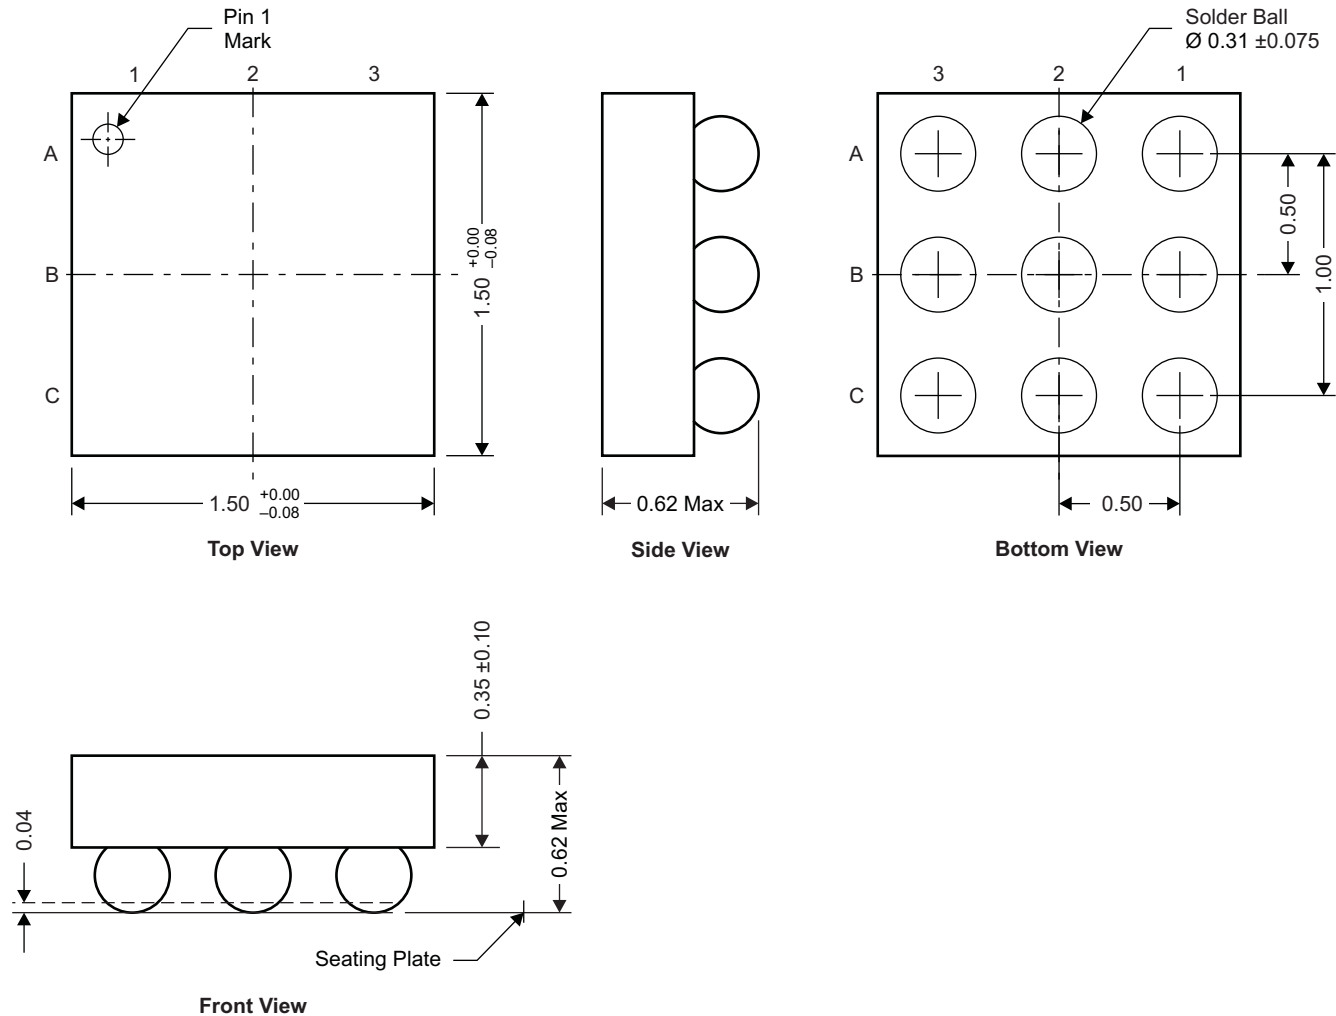


NOTE: 全部尺寸单位为 mm（除非另外注明）。

M0171-01

表 1. 引脚分配

位置	名称
A1	栅极
A2, A3, B1, B2, B3	源极
C1, C2, C3	漏极

7.2 建议的焊盘图案

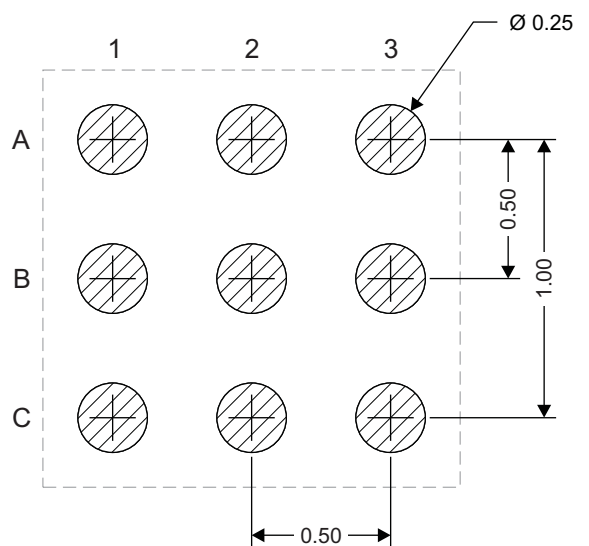

M0172-01

NOTE: 全部尺寸单位为 mm (除非另外注明)。

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
CSD22206W	ACTIVE	DSBGA	YZF	9	3000	RoHS & Green	SAC396 SNAGCU	Level-1-260C-UNLIM	-55 to 150	22206	Samples
CSD22206WT	ACTIVE	DSBGA	YZF	9	250	RoHS & Green	SAC396 SNAGCU	Level-1-260C-UNLIM	-55 to 150	22206	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

EXAMPLE BOARD LAYOUT


YZF0009

DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

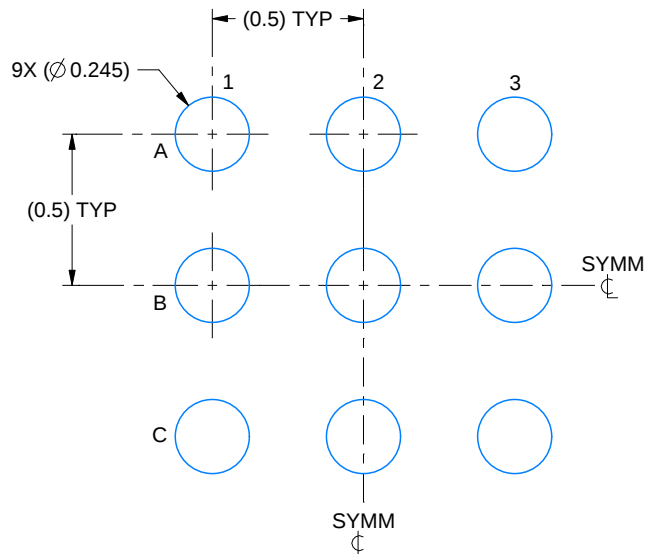

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 40X

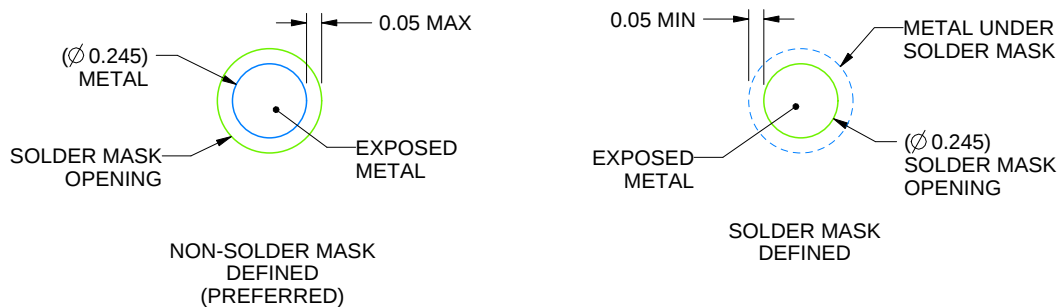

SOLDER MASK DETAILS
NOT TO SCALE

4219558/A 10/2018

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. See Texas Instruments Literature No. SNVA009 (www.ti.com/lit/snva009).

EXAMPLE STENCIL DESIGN

YZF0009

DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

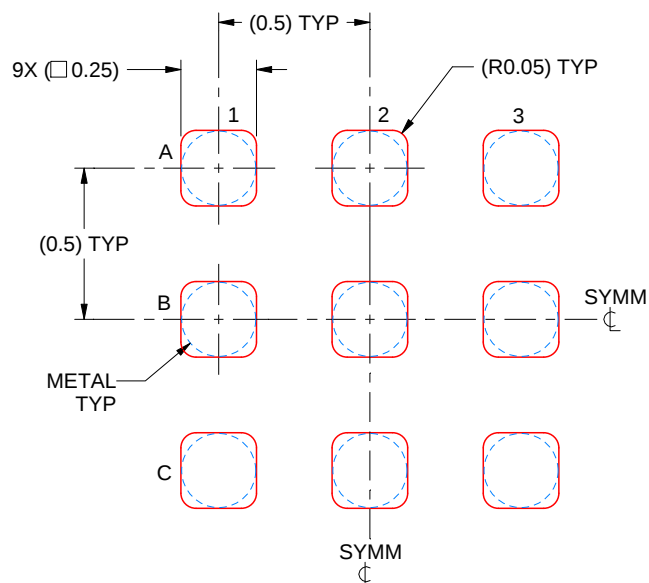

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL
SCALE: 40X

4219558/A 10/2018

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2020 德州仪器半导体技术（上海）有限公司