

## TPD1E10B06 采用 0402 封装的单通道 ESD 保护二极管

### 1 特性

- 可为低压 I/O 接口提供系统级静电放电 (ESD) 保护
- IEC 61000-4-2 4 级 ESD 保护
  - $\pm 30\text{kV}$  接触放电
  - $\pm 30\text{kV}$  气隙放电
- IEC 61000-4-5 浪涌: 6A (8/20 $\mu\text{s}$ )
- I/O 电容 12pF (典型值)
- $R_{\text{DYN}}$ : 0.4 $\Omega$  (典型值)
- 直流击穿电压:  $\pm 6\text{V}$  (最小值)
- 超低泄漏电流: 100nA (典型值)
- 钳位电压: 10V ( $I_{\text{PP}} = 1\text{A}$  时的最大值)
- 工业温度范围:  $-40^{\circ}\text{C}$  至  $125^{\circ}\text{C}$
- 采用节省空间的 0402 封装 (1mm × 0.6mm × 0.5mm)

### 2 应用

- 终端设备:
  - 平板电脑
  - 远程控制器
  - 可穿戴产品
  - 机顶盒
  - 电子销售点 (EPOS)
  - 电子书
- 接口:
  - 音频线路
  - 按钮
  - 通用输入/输出 (GPIO)

### 3 说明

TPD1E10B06 器件是一款采用小型 0402 封装的单通道 ESD 瞬态电压抑制 (TVS) 二极管。这款 TVS 保护产品提供  $\pm 30\text{kV}$  接触 ESD 和  $\pm 30\text{kV}$  IEC 气隙保护, 并具有一个带背靠背 TVS 二极管的 ESD 钳位电路, 用于支持双极或双向信号。该 ESD 保护二极管的线路电容为 12pF, 适用于支持数据传输速率高达 400Mbps 应用。0402 封装符合行业标准, 便于将元件安装到空间受限型应用。


ESD 保护产品的典型应用是为音频线路 (麦克风、耳机和扬声器)、SD 接口、键盘或其他按钮、USB 端口的 VBUS 引脚和 ID 引脚以及通用 I/O 端口等提供电路保护。该 ESD 钳位有利于为电子书、平板电脑、远程控制器、可穿戴设备、机顶盒以及电子销售点等终端设备提供保护。

器件信息<sup>(1)</sup>

| 器件型号       | 封装        | 封装尺寸 (标称值)      |
|------------|-----------|-----------------|
| TPD1E10B06 | X1SON (2) | 0.60mm x 1.00mm |

(1) 要了解所有可用封装, 请见数据表末尾的可订购产品附录。

应用电路原理图

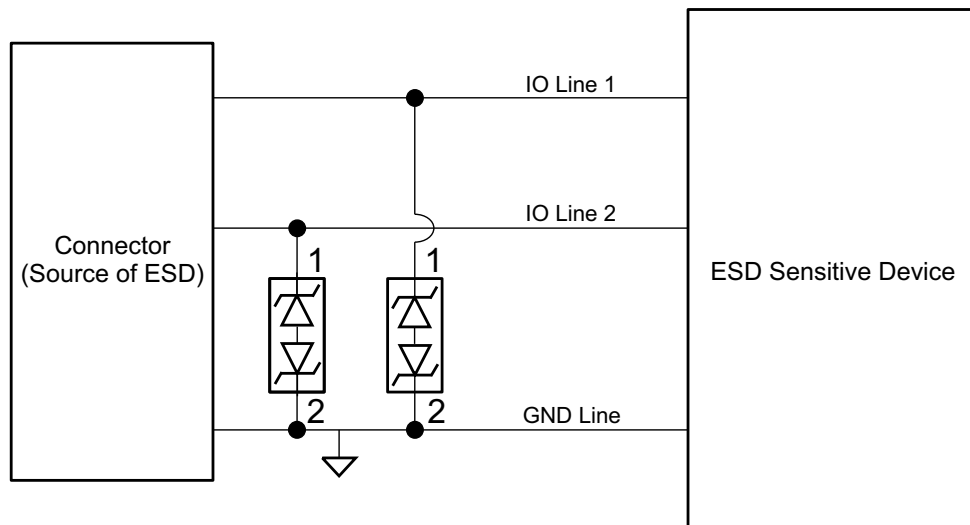

## 目录

|          |                                        |          |           |                                       |           |
|----------|----------------------------------------|----------|-----------|---------------------------------------|-----------|
| <b>1</b> | <b>特性</b>                              | <b>1</b> | 7.3       | Feature Description                   | 7         |
| <b>2</b> | <b>应用</b>                              | <b>1</b> | 7.4       | Device Functional Modes               | 7         |
| <b>3</b> | <b>说明</b>                              | <b>1</b> | <b>8</b>  | <b>Application and Implementation</b> | <b>8</b>  |
| <b>4</b> | <b>修订历史记录</b>                          | <b>2</b> | 8.1       | Application Information               | 8         |
| <b>5</b> | <b>Pin Configuration and Functions</b> | <b>3</b> | 8.2       | Typical Application                   | 8         |
| <b>6</b> | <b>Specifications</b>                  | <b>3</b> | <b>9</b>  | <b>Power Supply Recommendations</b>   | <b>10</b> |
| 6.1      | Absolute Maximum Ratings               | 3        | <b>10</b> | <b>Layout</b>                         | <b>10</b> |
| 6.2      | ESD Ratings                            | 3        | 10.1      | Layout Guidelines                     | 10        |
| 6.3      | Recommended Operating Conditions       | 3        | 10.2      | Layout Example                        | 10        |
| 6.4      | Thermal Information                    | 4        | <b>11</b> | <b>器件和文档支持</b>                        | <b>11</b> |
| 6.5      | Electrical Characteristics             | 4        | 11.1      | 社区资源                                  | 11        |
| 6.6      | Typical Characteristics                | 5        | 11.2      | 商标                                    | 11        |
| <b>7</b> | <b>Detailed Description</b>            | <b>7</b> | 11.3      | 静电放电警告                                | 11        |
| 7.1      | Overview                               | 7        | 11.4      | Glossary                              | 11        |
| 7.2      | Functional Block Diagram               | 7        | <b>12</b> | <b>机械、封装和可订购信息</b>                    | <b>11</b> |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

| Changes from Revision C (April 2015) to Revision D    | Page |
|-------------------------------------------------------|------|
| • Added Added test condition frequency to capacitance | 4    |
| • 已添加 <a href="#">社区资源</a>                            | 11   |


| Changes from Revision B (October 2012) to Revision C                                    | Page |
|-----------------------------------------------------------------------------------------|------|
| • 已添加 引脚配置和功能部分，ESD 额定值表，特性 说明 部分，器件功能模式，应用和实施部分，电源相关建议部分，布局部分，器件和文档支持部分以及机械、封装和可订购信息部分 | 1    |

| Changes from Revision A (March 2012) to Revision B | Page |
|----------------------------------------------------|------|
| • Added THERMAL INFORMATION table                  | 4    |

| Changes from Original (February 2011) to Revision A | Page |
|-----------------------------------------------------|------|
| • 已更新 特性。                                           | 1    |
| • Added graphs to TYPICAL CHARACTERISTICS section   | 5    |
| • Added APPLICATION INFORMATION section             | 8    |

## 5 Pin Configuration and Functions

DPY Package  
2-Pin X1SON  
Top View



Pin Functions

| PIN | I/O | DESCRIPTION       |
|-----|-----|-------------------|
| 1   | I/O | ESD Protected I/O |
| 2   |     |                   |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

|                                                 | MIN | MAX | UNIT |
|-------------------------------------------------|-----|-----|------|
| Operating temperature                           | –40 | 125 | °C   |
| $I_{PP}$ Peak pulse current (tp = 8/20 $\mu$ s) |     | 6   | A    |
| $P_{PP}$ Peak pulse power (tp = 8/20 $\mu$ s)   |     | 90  | W    |
| $T_{stg}$ Storage temperature                   | –65 | 155 | °C   |

### 6.2 ESD Ratings

|                                     | VALUE                                                                          | UNIT  |
|-------------------------------------|--------------------------------------------------------------------------------|-------|
| $V_{(ESD)}$ Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2500 |
|                                     | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |
|                                     | IEC 61000-4-2 Contact Discharge                                                | 30000 |
|                                     | IEC 61000-4-2 Air-Gap Discharge                                                | 30000 |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                                       | MIN                      | NOM | MAX  | UNIT |
|---------------------------------------|--------------------------|-----|------|------|
| Operating Free-Air Temperature, $T_A$ | –40                      |     | 125  | °C   |
| Operating Voltage                     | Pin 1 to 2 or Pin 2 to 1 |     | –5.5 | 5.5  |

**TPD1E10B06**

ZHCS821D – FEBRUARY 2012 – REVISED NOVEMBER 2015

[www.ti.com.cn](http://www.ti.com.cn)
**6.4 Thermal Information**

| THERMAL METRIC <sup>(1)</sup> |                                              | TPD1E10B06  | UNIT |
|-------------------------------|----------------------------------------------|-------------|------|
|                               |                                              | DPY (X1SON) |      |
|                               |                                              | 2 PINS      |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 615.5       | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 404.8       | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 493.3       | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 127.7       | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 493.3       | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 162         | °C/W |

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

**6.5 Electrical Characteristics**


over operating free-air temperature range (unless otherwise noted)

| PARAMETER             |                                                         | TEST CONDITION                                                    | MIN | TYP  | MAX | UNIT |
|-----------------------|---------------------------------------------------------|-------------------------------------------------------------------|-----|------|-----|------|
| V <sub>RWM</sub>      | Reverse stand-off voltage                               | Pin 1 to 2 or Pin 2 to 1                                          |     |      | 5.5 | V    |
| I <sub>LEAK</sub>     | Leakage current                                         | Pin 1 = 5 V, Pin 2 = 0 V                                          |     |      | 100 | nA   |
| V <sub>Clamp1,2</sub> | Clamp voltage with ESD strike on pin 1, pin 2 grounded. | I <sub>PP</sub> = 1 A, t <sub>p</sub> = 8 to 20 μs <sup>(1)</sup> |     |      | 10  | V    |
|                       |                                                         | I <sub>PP</sub> = 5 A, t <sub>p</sub> = 8 to 20 μs <sup>(1)</sup> |     |      | 14  |      |
| V <sub>Clamp2,1</sub> | Clamp voltage with ESD strike on pin 2, pin 1 grounded. | I <sub>PP</sub> = 1 A, t <sub>p</sub> = 8 to 20 μs <sup>(1)</sup> |     |      | 8.5 | V    |
|                       |                                                         | I <sub>PP</sub> = 5 A, t <sub>p</sub> = 8 to 20 μs <sup>(1)</sup> |     |      | 14  |      |
| R <sub>DYN</sub>      | Dynamic resistance                                      | Pin 1 to Pin 2 <sup>(2)</sup>                                     |     | 0.32 |     | Ω    |
|                       |                                                         | Pin 2 to Pin 1 <sup>(2)</sup>                                     |     | 0.38 |     |      |
| C <sub>IO</sub>       | I/O capacitance                                         | V <sub>IO</sub> = 2.5 V; f = 1 MHz                                |     | 12   |     | pF   |
| V <sub>BR1,2</sub>    | Break-down voltage, pin 1 to pin 2                      | I <sub>IO</sub> = 1 mA                                            | 6   |      |     | V    |
| V <sub>BR2,1</sub>    | Break-down voltage, pin 2 to pin 1                      | I <sub>IO</sub> = 1 mA                                            | 6   |      |     | V    |


(1) Nonrepetitive current pulse 8 to 20 μs exponentially decaying waveform according to IEC 61000-4-5

(2) Extraction of R<sub>DYNAMIC</sub> using least squares fit of TLP characteristics between I<sub>PP</sub> = 10 A and I<sub>PP</sub> = 20 A.


## 6.6 Typical Characteristics

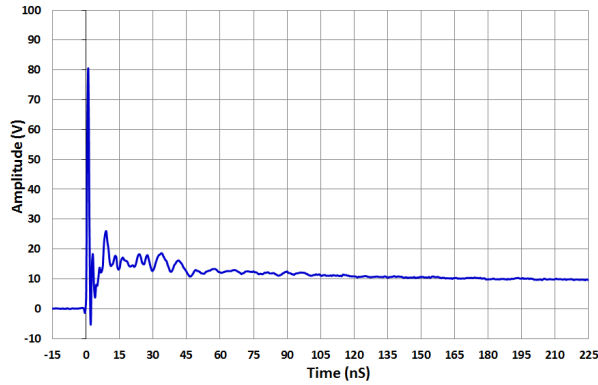


**Figure 1. IEC 61000-4-2 Clamp Voltage +8-kV Contact ESD**

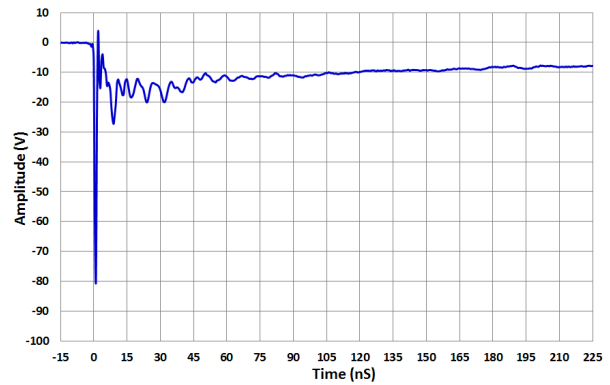


**Figure 2. IEC 61000-4-2 Clamp Voltage -8-kV Contact ESD**

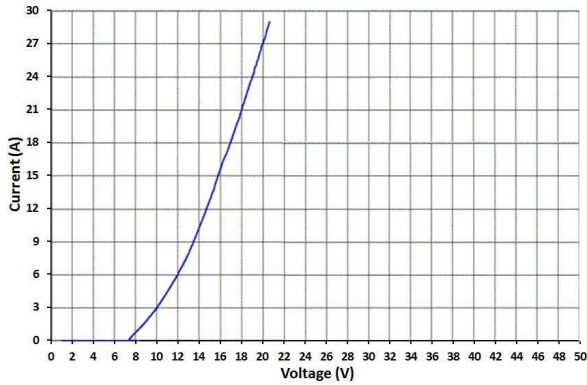


**Figure 3. Transmission Line Pulse (TLP) Waveform Pin 1 to Pin 2**

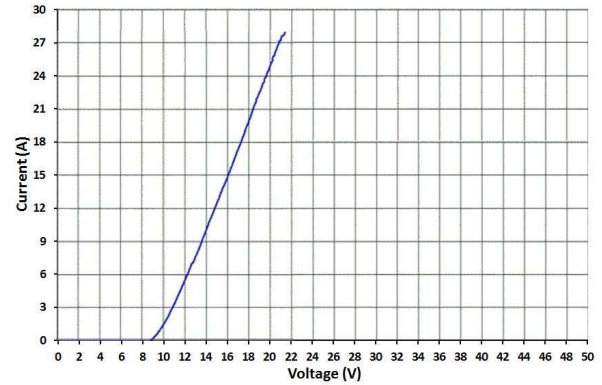

**Figure 4. Transmission Line Pulse (TLP) Waveform Pin 2 to Pin 1**

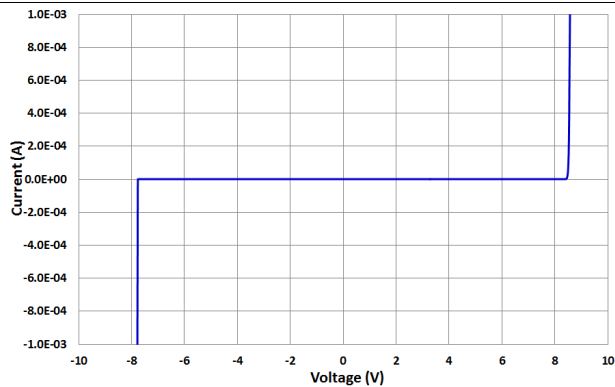

**Figure 5. IV Curve**

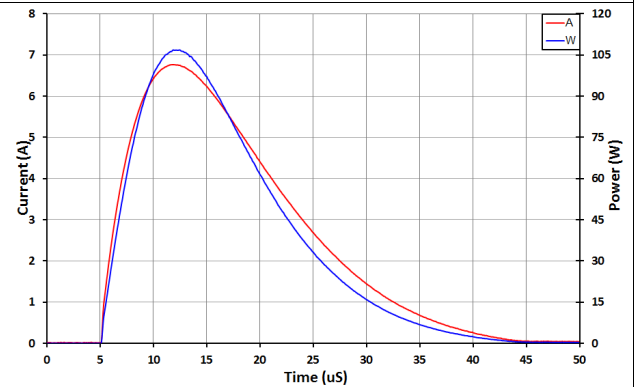

**Figure 6. Positive Surge Waveform 8 to 20 μs**

# TPD1E10B06

ZHCS821D – FEBRUARY 2012 – REVISED NOVEMBER 2015

[www.ti.com.cn](http://www.ti.com.cn)

## Typical Characteristics (continued)

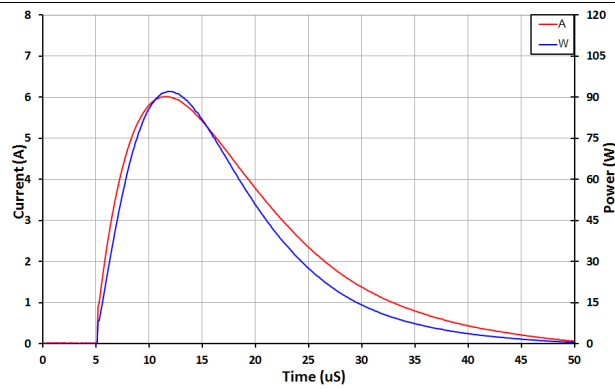


Figure 7. Negative Surge Waveform 8 to 20  $\mu$ s

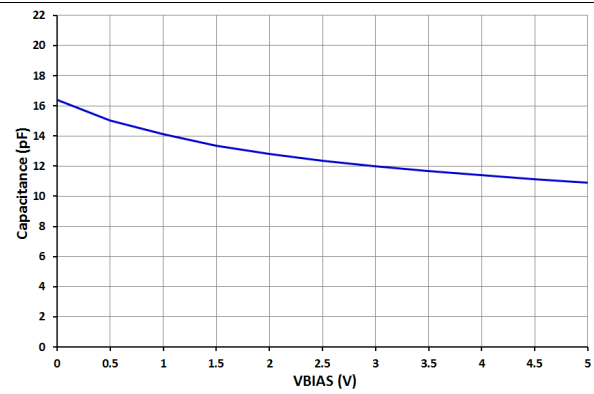


Figure 8. Pin Capacitance Across  $V_{BIAS}$

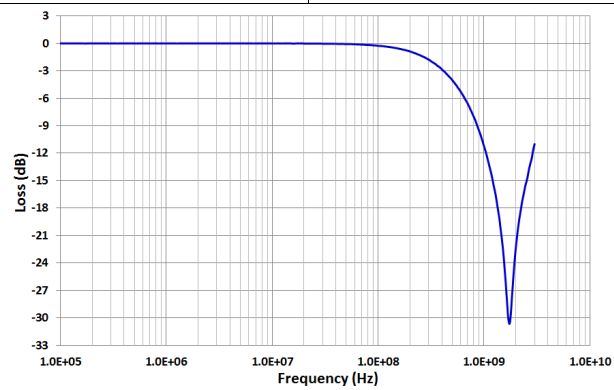


Figure 9. Insertion Loss


## 7 Detailed Description

### 7.1 Overview

The TPD1E10B06 is a single-channel ESD TVS diode in a small 0402 package. This TVS protection product offers  $\pm 30$ -kV IEC air-gap,  $\pm 30$ -kV contact ESD protection, and has an ESD clamp circuit with a back-to-back TVS diode for bipolar or bidirectional signal support. The 12-pF line capacitance of this ESD protection diode is suitable for a wide range of applications supporting data rates up to 400 Mbps. The 0402 package is an industry standard and is convenient for component placement in space-saving applications.

Typical application of this ESD protection product is the circuit protection for audio lines (microphone, earphone, and speakerphone), SD interfacing, keypad or other buttons, VBUS pin and ID pin of USB ports, and general-purpose I/O ports. This ESD clamp is a good fit for the protection of the end equipment like ebooks, tablets, remote controllers, wearables, set-top boxes, and electronic point of sale equipment.

### 7.2 Functional Block Diagram

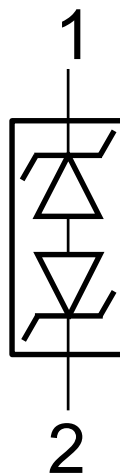

### 7.3 Feature Description

TPD1E10B06 is a bidirectional TVS with high ESD protection level. This device protects circuit from ESD strikes up to  $\pm 30$ -kV contact and  $\pm 30$ -kV air-gap specified in the IEC 61000-4-2 level 4 international standard. The device can also handle up to 6-A surge current (IEC61000-4-5 8/20 $\mu$ s). The I/O capacitance of 12 pF supports a data rate up to 400 Mbps. This clamping device has a small dynamic resistance of 0.4  $\Omega$  typically, which makes the clamping voltage low when the device is actively protecting other circuits. For example, the clamping voltage is only 10 V when the device is taking 1-A transient current. The breakdown is bidirectional so that this protection device is a good fit for GPIO and especially audio lines which carry bidirectional signals. Low leakage allows the diode to conserve power when working below the  $V_{RWM}$ . The industrial temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  makes this ESD device work at extensive temperatures in most environments. The space-saving 0402 package can fit into small electronic devices like mobile equipment and wearables.

### 7.4 Device Functional Modes

TPD1E10B06 is a passive clamp that has low leakage during normal operation when the voltage between pin 1 and pin 2 is below  $V_{RWM}$  and activates when the voltage between pin 1 and pin 2 goes above  $V_{BR}$ . During IEC ESD events, transient voltages as high as  $\pm 30$  kV can be clamped between the two pins. When the voltages on the protected lines fall below the trigger voltage, the device reverts back to the low leakage passive state.

## 8 Application and Implementation


### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

When a system contains a human interface connector, the system becomes vulnerable to large system-level ESD strikes that standard ICs cannot survive. TVS ESD protection diodes are typically used to suppress ESD at these connectors. TPD1E10B06 is a single-channel ESD protection device containing back-to-back TVS diodes, which is typically used to provide a path to ground for dissipating ESD events on bidirectional signal lines between a human interface connector and a system. As the current from ESD passes through the device, only a small voltage drop is present across the diode structure. This is the voltage presented to the protected IC. The low  $R_{DYN}$  of the triggered TVS holds this voltage,  $V_{CLAMP}$ , to a tolerable level to the protected IC.

### 8.2 Typical Application

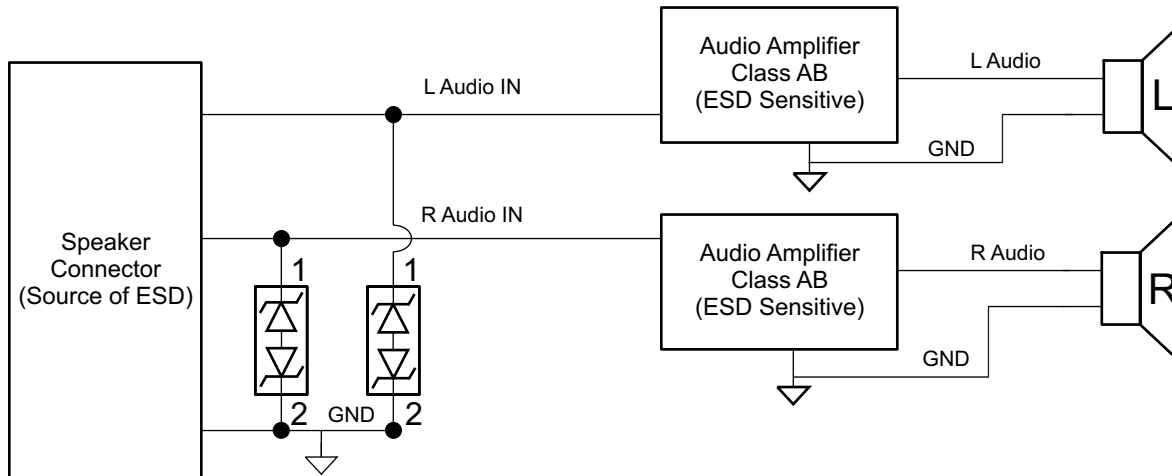

**Figure 10. Typical Application Schematic**

#### 8.2.1 Design Requirements

For this design example, two TPD1E10B06s will be used to protect left and right audio channels. For this audio application, the following system parameters are known.

**Table 1. Design Parameters**

| DESIGN PARAMETER                      | VALUE                          |
|---------------------------------------|--------------------------------|
| Audio Amplifier Class                 | AB                             |
| Audio signal voltage range            | –3 V to 3 V                    |
| Audio frequency content               | 20 Hz to 20 kHz                |
| Required IEC 61000-4-2 ESD Protection | ±20-kV Contact/ ±25-kV Air-Gap |

#### 8.2.2 Detailed Design Procedure

To begin the design process, some parameters must be decided upon; the designer should make sure:


- Voltage range on the protected line must not exceed the reverse standoff voltage of the TVS diode(s) ( $V_{RWM}$ )
- Operating frequency is supported by the I/O capacitance  $C_{IO}$  of the TVS diode
- IEC 61000-4-2 protection requirement is covered by the IEC performance of the TVS diode

For this application, the audio signal voltage range is  $-3\text{ V}$  to  $3\text{ V}$ . The  $V_{\text{RWM}}$  for the TVS is  $-5.5\text{ V}$  to  $5.5\text{ V}$ ; therefore, the bidirectional TVS will not break down during normal operation, and therefore normal operation of the audio signal will not be effected due to the signal voltage range. In this application, a bidirectional TVS like TPD1E10B06 is required.


Next, consider the frequency content of this audio signal. In this application with the class AB amplifier, the frequency content is from  $20\text{ Hz}$  to  $20\text{ kHz}$ ; ensure that the TVS I/O capacitance will not distort this signal by filtering it. With TPD1E10B06 typical capacitance of  $12\text{ pF}$ , which leads to a typical 3-dB bandwidth of  $400\text{ MHz}$ , this diode has sufficient bandwidth to pass the audio signal without distorting it.

Finally, the human interface in this application requires above standard Level 4 IEC 61000-4-2 system-level ESD protection ( $\pm 20\text{-kV}$  Contact/  $\pm 25\text{-kV}$  Air-Gap). A standard TVS cannot survive this level of IEC ESD stress. However, TPD1E10B06 can survive at least  $\pm 30\text{-kV}$  Contact/  $\pm 30\text{-kV}$  Air-Gap. Therefore, the device can provide sufficient ESD protection for the interface, even though the requirements are stringent. For any TVS diode to provide the full range of ESD protection capabilities, as well as to minimize the noise and EMI disturbances the board will see during ESD events, a system designer must use proper board layout of their TVS ESD protection diodes. See [Layout](#) for instructions on properly laying out TPD1E10B06.

### 8.2.3 Application Curves

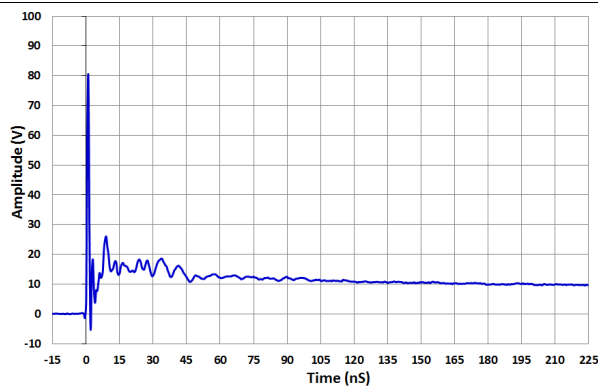

**Figure 11. IEC 61000-4-2 Clamp Voltage +8-kV Contact ESD**

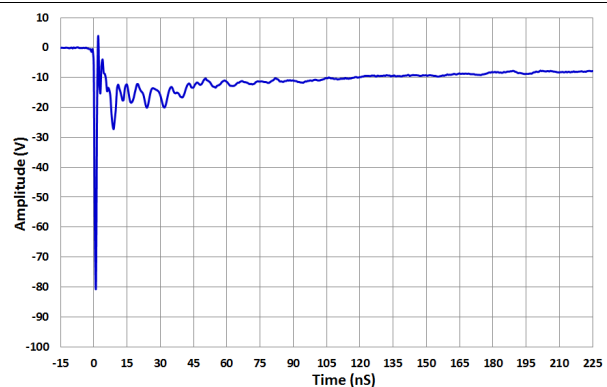

**Figure 12. IEC 61000-4-2 Clamp Voltage -8-kV Contact ESD**

## 9 Power Supply Recommendations


This device is a passive TVS diode-based ESD protection device, therefore there is no requirement to power it. Take care to make sure that the maximum voltage specifications for each pin are not violated.

## 10 Layout

### 10.1 Layout Guidelines

- The optimum placement is as close to the connector as possible.
  - EMI during an ESD event can couple from the trace being struck to other nearby unprotected traces, resulting in early system failures.
  - The PCB designer must minimize the possibility of EMI coupling by keeping any unprotected traces away from the protected traces which are between the TVS and the connector.
- Route the protected traces as straight as possible.
- Eliminate any sharp corners on the protected traces between the TVS and the connector by using rounded corners with the largest radii possible.
  - Electric fields tend to build up on corners, increasing EMI coupling.
- If pin 1 or pin 2 is connected to ground, use a thick and short trace for this return path

### 10.2 Layout Example

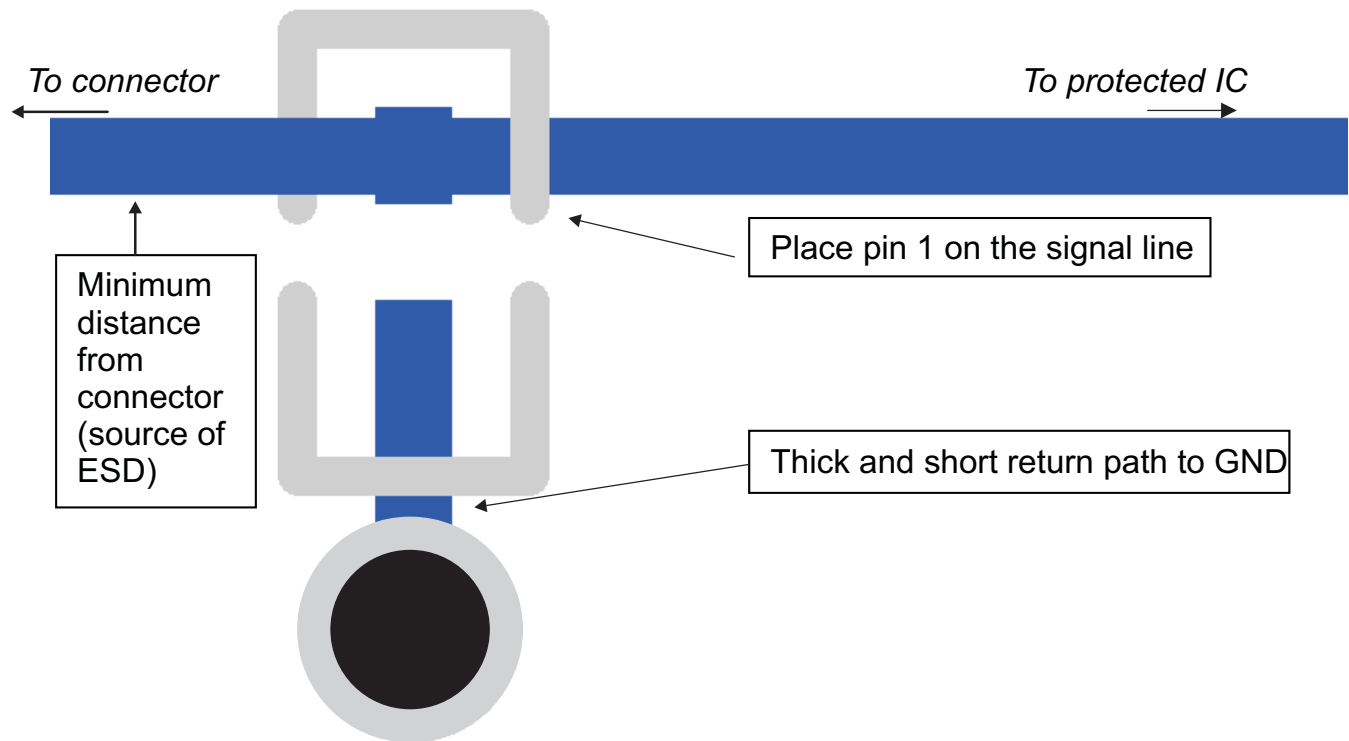

**Figure 13. Layout Recommendation**

## 11 器件和文档支持

### 11.1 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 11.2 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 11.3 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

### 11.4 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。欲获得该数据表的浏览器版本，请查阅左侧的导航栏

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)         | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-------------------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| PTPD1E10B06DYAR  | ACTIVE        | SOT-5X3      | DYA                | 2    | 10000          | Non-RoHS &<br>Non-Green | Call TI                              | Call TI              | -40 to 125   |                         | <a href="#">Samples</a> |
| TPD1E10B06DPYR   | ACTIVE        | X1SON        | DPY                | 2    | 10000          | RoHS & Green            | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | (B1, B2, B6, BI)        | <a href="#">Samples</a> |
| TPD1E10B06DPYT   | ACTIVE        | X1SON        | DPY                | 2    | 250            | RoHS & Green            | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | (B1, B2, B6, BI)        | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TPD1E10B06 :**

- Automotive : [TPD1E10B06-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ   | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|-------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPD1E10B06DPYR | X1SON        | DPY             | 2    | 10000 | 178.0              | 8.4                | 0.7     | 1.15    | 0.47    | 2.0     | 8.0    | Q1            |
| TPD1E10B06DPYR | X1SON        | DPY             | 2    | 10000 | 180.0              | 9.5                | 0.66    | 1.15    | 0.66    | 2.0     | 8.0    | Q1            |
| TPD1E10B06DPYR | X1SON        | DPY             | 2    | 10000 | 180.0              | 8.4                | 0.07    | 1.1     | 0.47    | 2.0     | 8.0    | Q1            |
| TPD1E10B06DPYT | X1SON        | DPY             | 2    | 250   | 178.0              | 8.4                | 0.7     | 1.15    | 0.47    | 2.0     | 8.0    | Q1            |
| TPD1E10B06DPYT | X1SON        | DPY             | 2    | 250   | 180.0              | 8.4                | 0.07    | 1.1     | 0.47    | 2.0     | 8.0    | Q1            |
| TPD1E10B06DPYT | X1SON        | DPY             | 2    | 250   | 180.0              | 9.5                | 0.66    | 1.15    | 0.66    | 2.0     | 8.0    | Q1            |
| TPD1E10B06DPYT | X1SON        | DPY             | 2    | 250   | 180.0              | 9.5                | 0.73    | 1.13    | 0.5     | 2.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ   | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|-------|-------------|------------|-------------|
| TPD1E10B06DPYR | X1SON        | DPY             | 2    | 10000 | 205.0       | 200.0      | 33.0        |
| TPD1E10B06DPYR | X1SON        | DPY             | 2    | 10000 | 184.0       | 184.0      | 19.0        |
| TPD1E10B06DPYR | X1SON        | DPY             | 2    | 10000 | 203.2       | 196.8      | 33.3        |
| TPD1E10B06DPYT | X1SON        | DPY             | 2    | 250   | 205.0       | 200.0      | 33.0        |
| TPD1E10B06DPYT | X1SON        | DPY             | 2    | 250   | 203.2       | 196.8      | 33.3        |
| TPD1E10B06DPYT | X1SON        | DPY             | 2    | 250   | 184.0       | 184.0      | 19.0        |
| TPD1E10B06DPYT | X1SON        | DPY             | 2    | 250   | 189.0       | 185.0      | 36.0        |

DPY (R-PX1SON-N2)


PLASTIC SMALL OUTLINE NO-LEAD

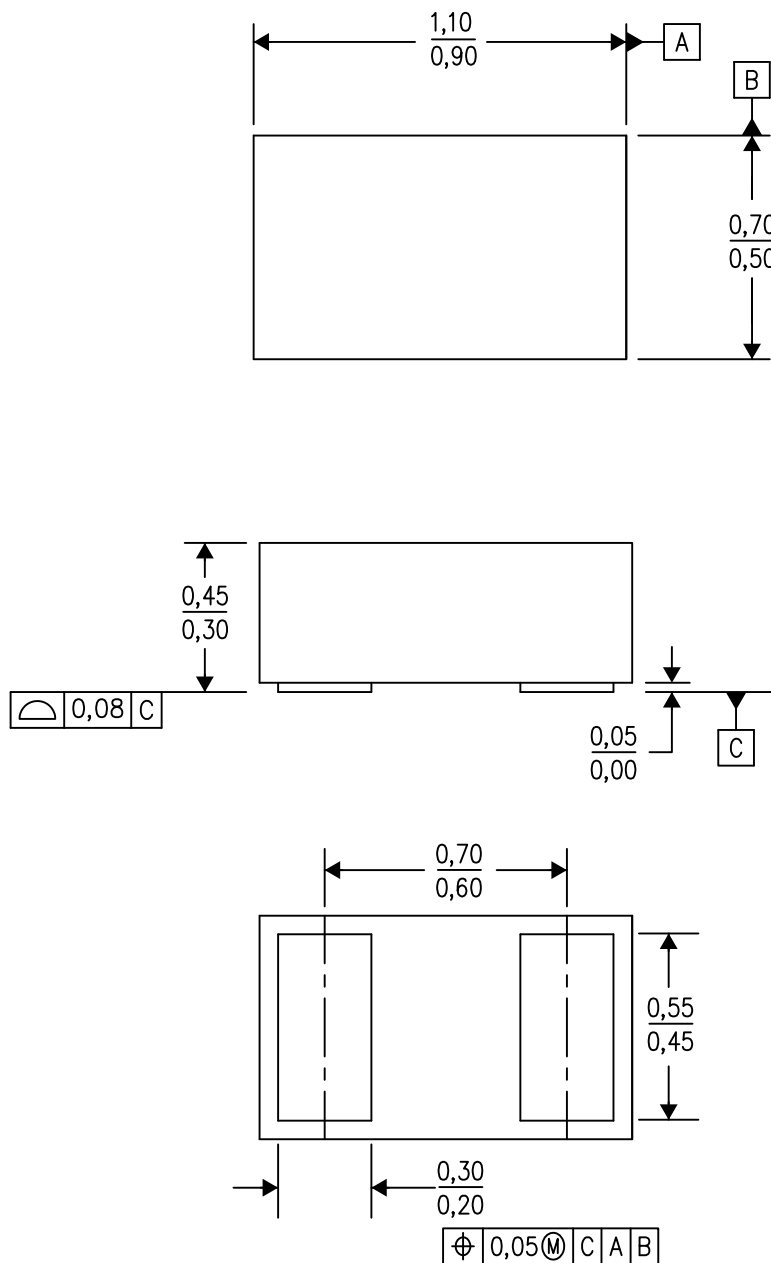

4211012/D 08/14

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5-1994.
  - B. This drawing is subject to change without notice.
  - C. SON (Small Outline No-Lead) package configuration.


DPY0002A



# PACKAGE OUTLINE

X1SON - 0.45 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

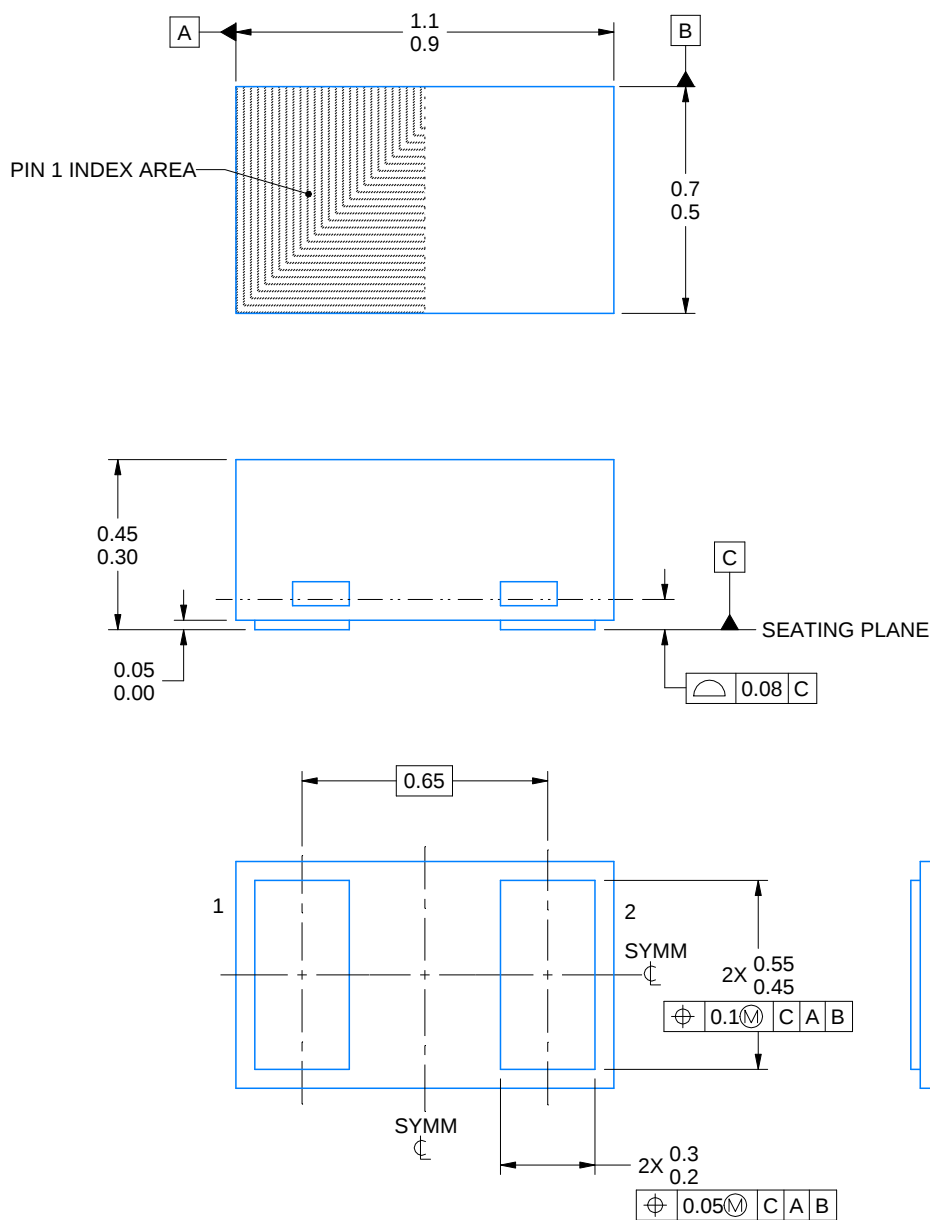

4224561/B 03/2021

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT



DPY0002A

X1SON - 0.45 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

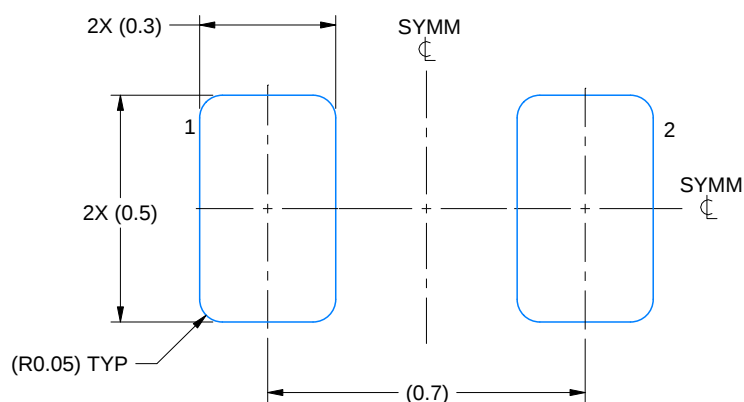

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:60X

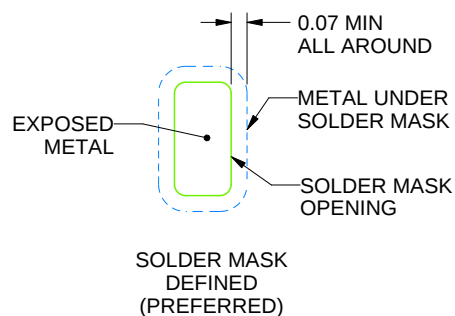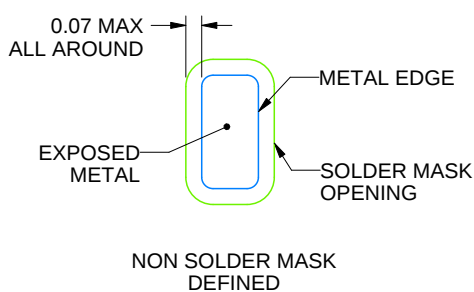

SOLDER MASK DETAILS

4224561/B 03/2021

NOTES: (continued)


3. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
4. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

## EXAMPLE STENCIL DESIGN

DPY0002A

X1SON - 0.45 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

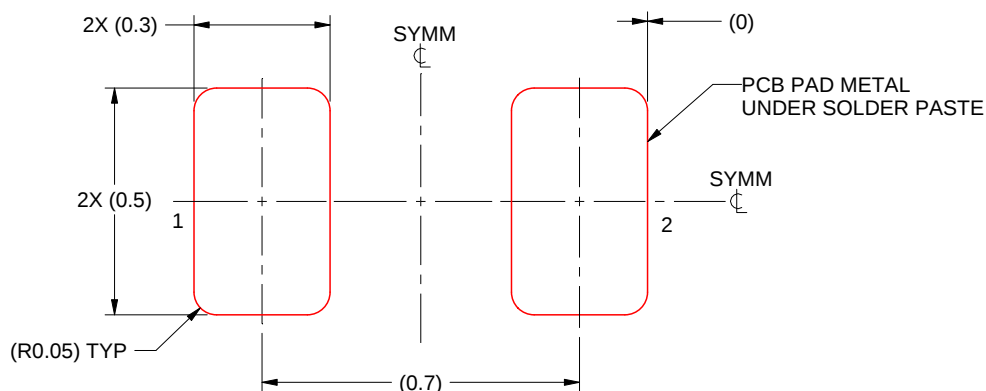


SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:60X

4224561/B 03/2021

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

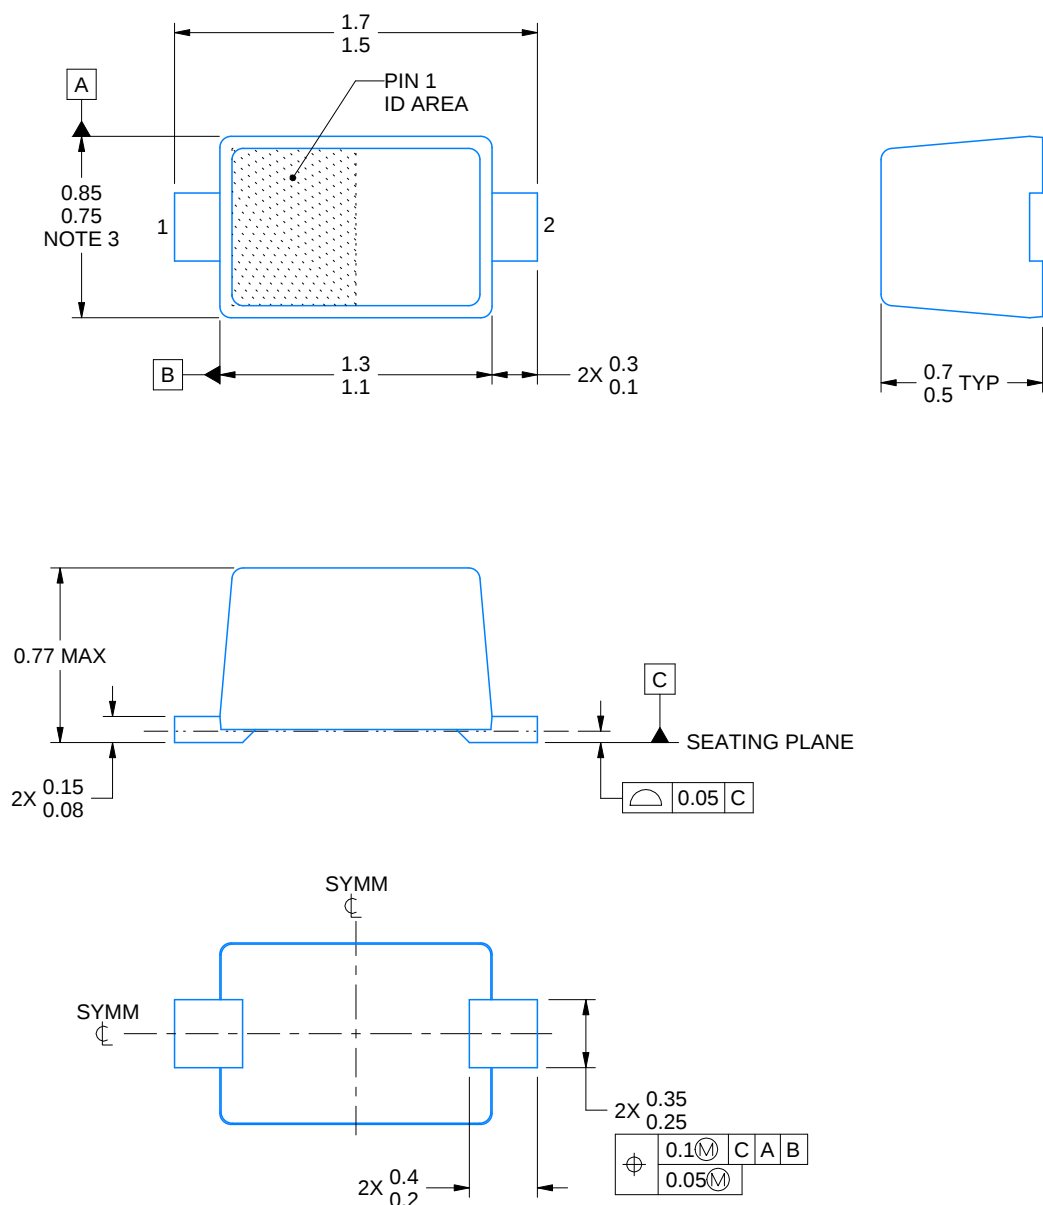

4224978/A 04/2019

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.

# EXAMPLE BOARD LAYOUT


DYA0002A

SOT - 0.77 mm max height

PLASTIC SMALL OUTLINE

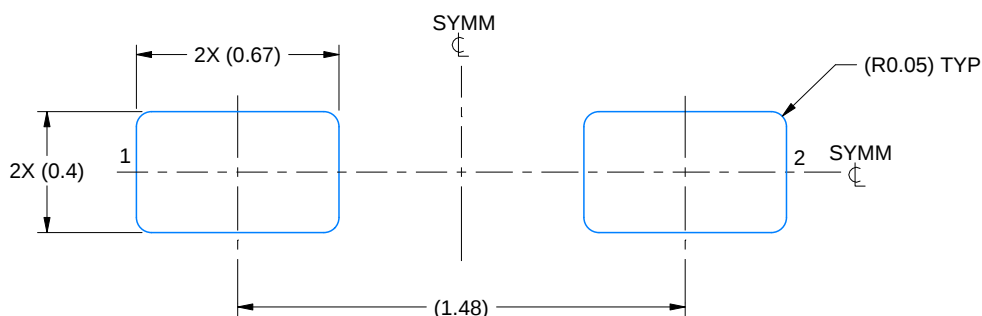

LAND PATTERN EXAMPLE  
SCALE:40X

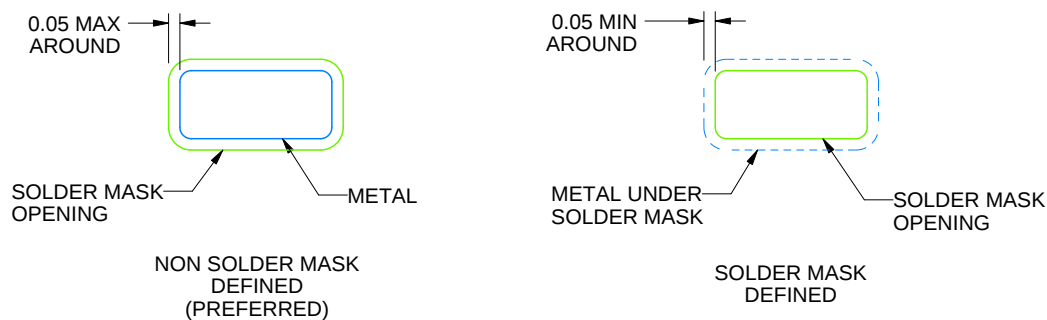

SOLDERMASK DETAILS

4224978/A 04/2019

NOTES: (continued)


4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DYA0002A

SOT - 0.77 mm max height

PLASTIC SMALL OUTLINE

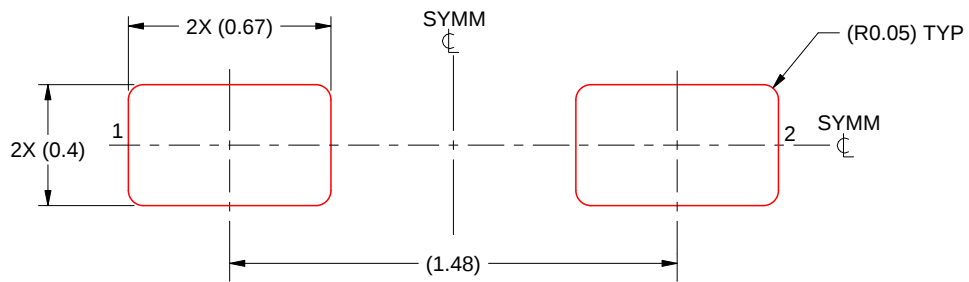

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:40X

4224978/A 04/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

## 重要声明和免责声明

TI 提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 TI 的销售条款 (<https://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 或 [ti.com.cn](https://www.ti.com.cn) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122  
Copyright © 2021 德州仪器半导体技术（上海）有限公司