


Dimensions and Schematics

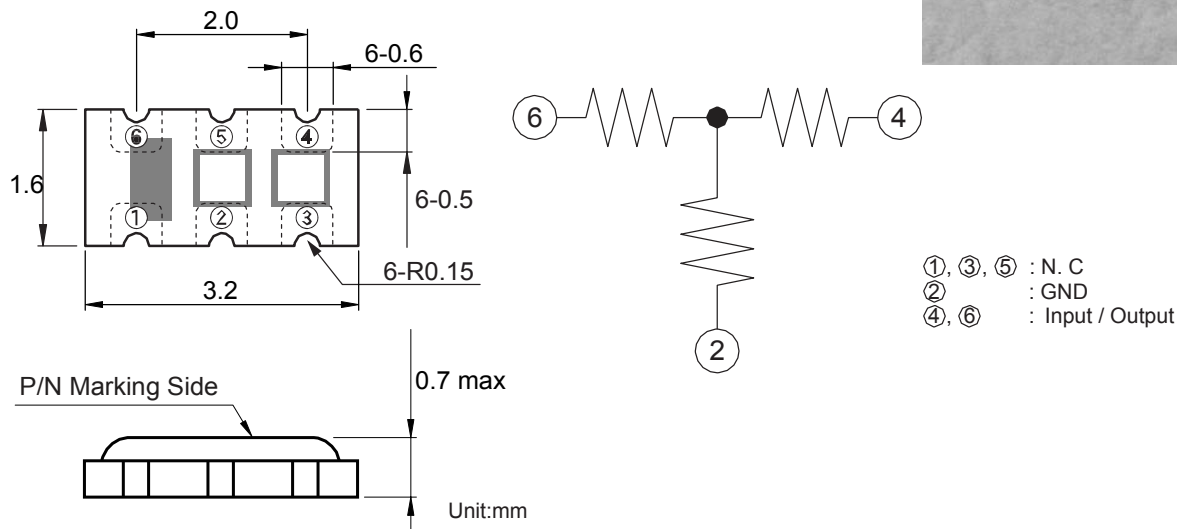

Rating

Style No.	Frequency Range [MHz]	Attenuation [dB]	Rated Power [W]	VSWR	Impedance [Ω]	Working Temp. Range [C]
CAT3131-0020	DC~1000	20 ± 1.3	1 / 10	1.25 max.	50	-55 ~ +125 C
CAT3131-0003	DC~3000	3 ± 0.5				
CAT3131-0006	DC~3000	6 ± 0.5				
CAT3131-0010	DC~3000	10 ± 0.7				

- For other attenuations, if required. Please contact us for possibility.
- Test Fixture : Teflon 0.4 mm

Recommendable Footprint

