

Rev.00


RoHS Compliant

Datasheet of SAW Filter 1411 GPS

KYOCERA Part No. : SF14-1575M5UBA1

Rating

Items	Rating	Unit	Note	
Operating Temperature Range	-30 to +85	deg.C		
Storage Temperature Range	-40 to +85	deg.C		
Max Input Power	+12	dBm	5,000Hours,Ta=50deg.C, CW	
Input Port Nominal Impedance	50	ohm	Unbalance	
Output Port Nominal Impedance	100	ohm	Unbalance	

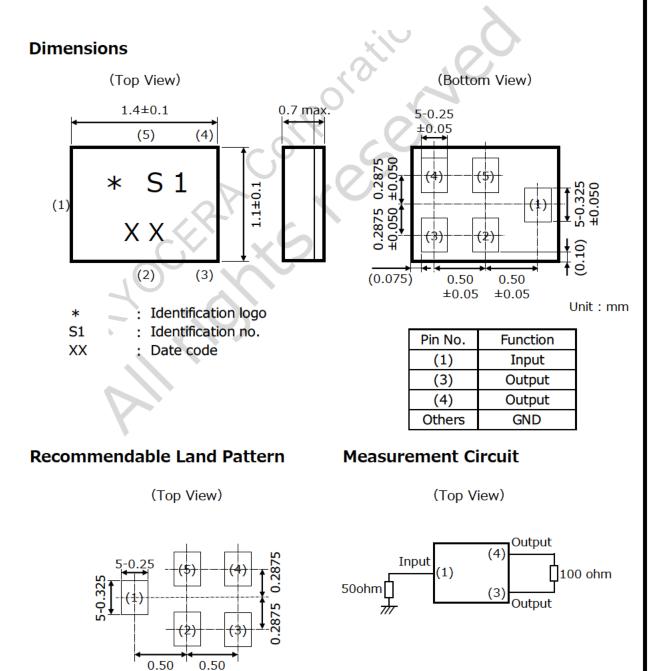


Rev.00

Electrical Characteristics

	Frequency (MHz)		Characteristics			Unit	Note	
			min.	typ.	max.			
Nominal Frequency		-			1575.42		MHz	
Insertion Loss	1574.42	to	1576.42	-	1.1	1.6	dB	
Amplitude Ripple(peak to peak)	1574.42	to	1576.42	-	0.01	1.0	dB	
Input VSWR	1574.42	to	1576.42	-	1.1	1.6	-	
Output VSWR	1574.42	to	1576.42	-	1.1	1.6	-	
Absolute Attenuation	10	to	810	50	57	-	dB	
	810	to	960	50	55		dB	
	1429	to	1453	35	44	-	dB	
	1501	to	1525	27	32	-	dB	
	1920	to	1980	41	49	<u> </u>	dB	
	1980	to	2400	29	33	-	dB	
	2400	to	2500	46	54	-	dB	
	2500	to	3000	43	50	-	dB	
	3000	to	4200	40	49	-	dB	
	4200	to	6000	38	47	-	dB	
Amplitude Imbalance	1574.42	to	1576 42	-1.4	0.3	+1.4	dB	
Phase Imbalance	1574.42	to	1576.42	-8.0	2.0	+8.0	deg.	

KYOCERA Corporation




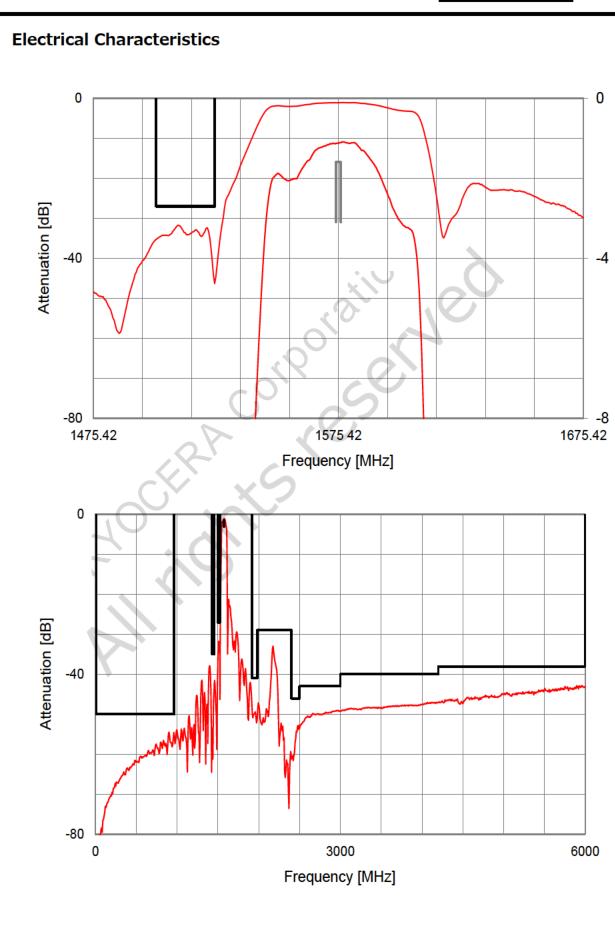

KYOCERA Corporation

Rev.00




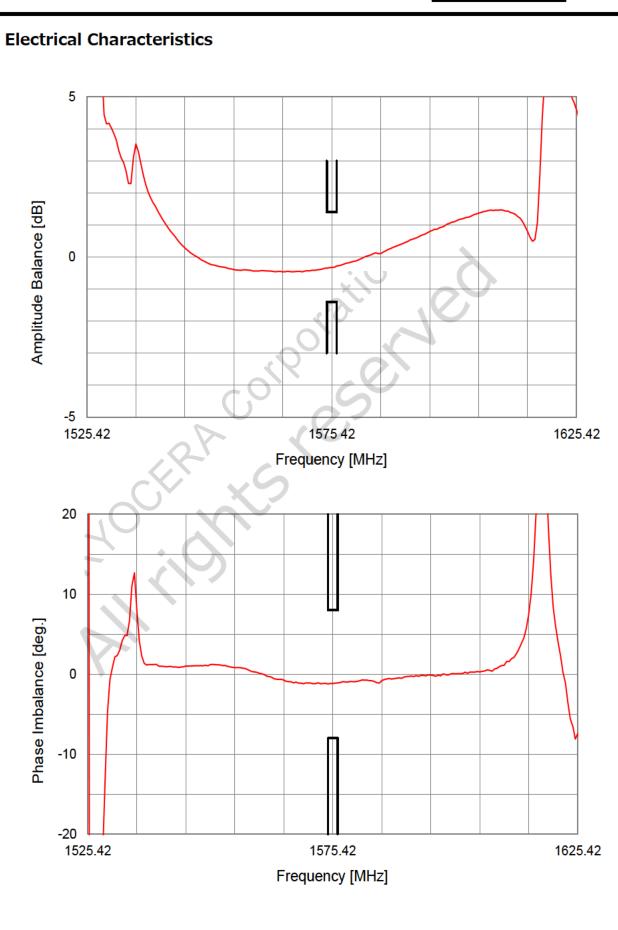


4/7

Rev.00



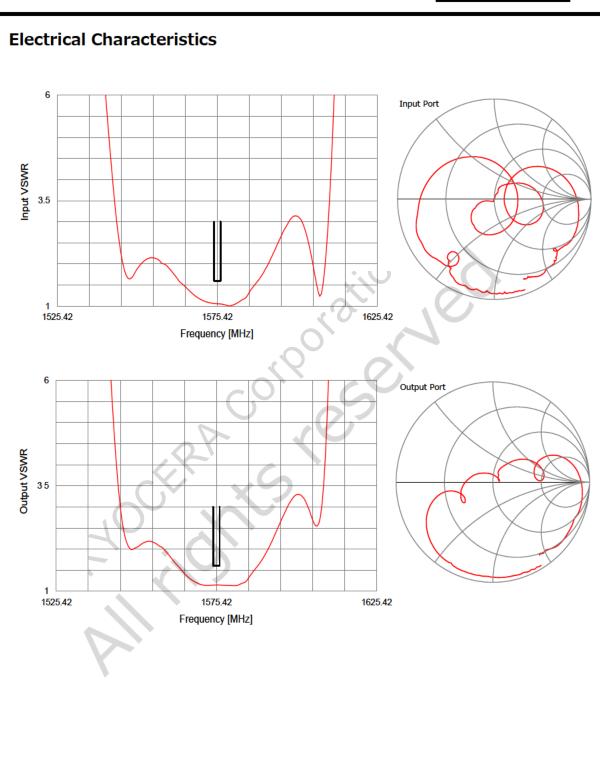

🔇 КУОСЕRА

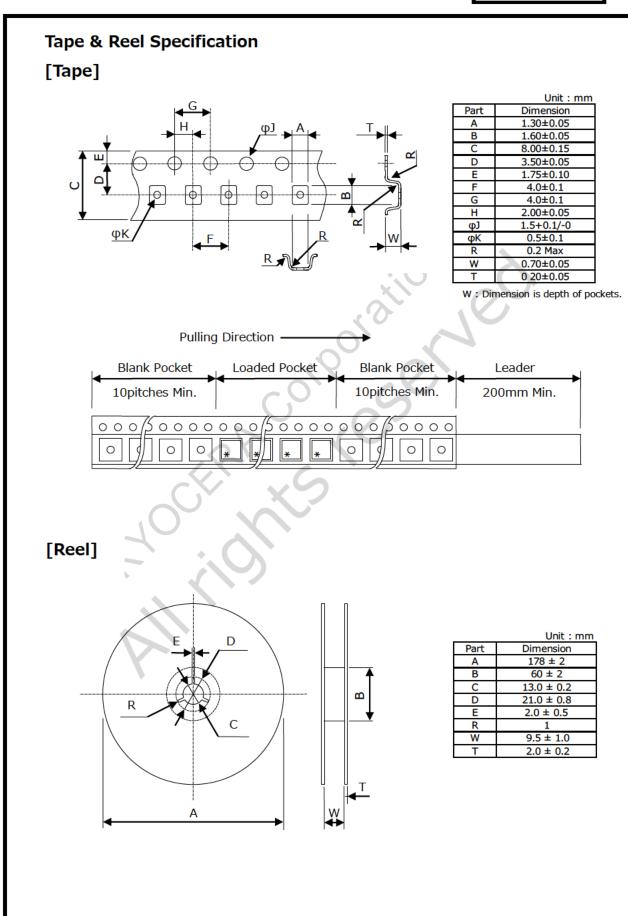

Notice

- 1. Characteristics described in this datasheet are for references specifications shall be based on written documents agreed by each party.
- 2. Contents in this datasheet are subject to change without notice. It is recommended to confirm the latest information at the time of usage. Also, this datasheet is revised once a year. We may not be able to accept requests based on old datasheets.
- 3. Products in this datasheet are intended to be used in general electronic equipment such as office equipment, audio and visual equipment, communication equipment, measurement instrument and home appliances. It is absolutely recommended to consult with our sales representatives in advance upon planning to use our products in applications which require extremely high quality and reliability such as aircraft and aerospace equipment, traffic systems, safety systems, power plant and medical equipment including life maintenance systems.
- 4. Even though we strive for improvements of quality and reliability of products, it is requested to design with enough safety margin in equipment or systems in order not to threaten human lives directly or damage human bodies or properties by an accidental result of products.
- 5. It is requested to design based on guaranteed specifications for such as maximum ratings, operating voltage and operating temperature. It is not the scope o our guarantee for unsatisfactory results due to misuse or inadequate usage of products in the datasheet.
- 6. Operation summaries and circuit examples in this datasheet are intended to explain typical operation and usage of the product. It is recommended to perform circuit and assembly design considering surrounding conditions upon using products in this datasheet.
- 7. Technical information described in this datasheet is meant to explain typical operations and applications of products, and it is not intended to guarantee or license intellectual properties or other industrial rights of the third party or Kyocera.
- 8. Trademarks, logos and brand names used in this datasheet are owned by Kyocera or the corresponding third party.
- 9. Certain products in this datasheet are subject to the Foreign Exchange and Foreign Trade Control Act of Japan, and require the license from Japanese Government upon exporting the restricted products and technical information under the law. Besides, it is requested not to use products and technical information in the datasheet for the development and/or manufacture of weapons of mass destruction or other conventional weapons, nor to provide them to any third party with the possibility of having such purposes.
- 10. It is prohibited to reprint and reproduce a part or whole of this datasheet without permission.